

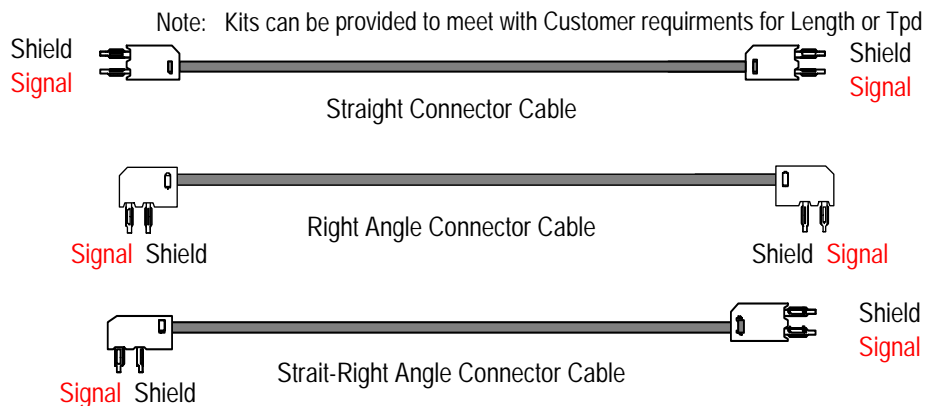


Features and Benefits

- Solderless Termination
 - Dual position compliant-pin inter-connection with plated-through hole.
 - High retention force (3Kg)
 - No damage to the plated through hole on the PC board.
 - Termination Resistance 20mOhm(Typ). Finished Hole - 0.8 to 0.85mm for press-fit
- Offset cable lead out position
 - Avoid Human error
 - Easy to check
- Guaranteed Tpd skew per kit with TDT measurement (Using Tektronix 11801B-SD24)

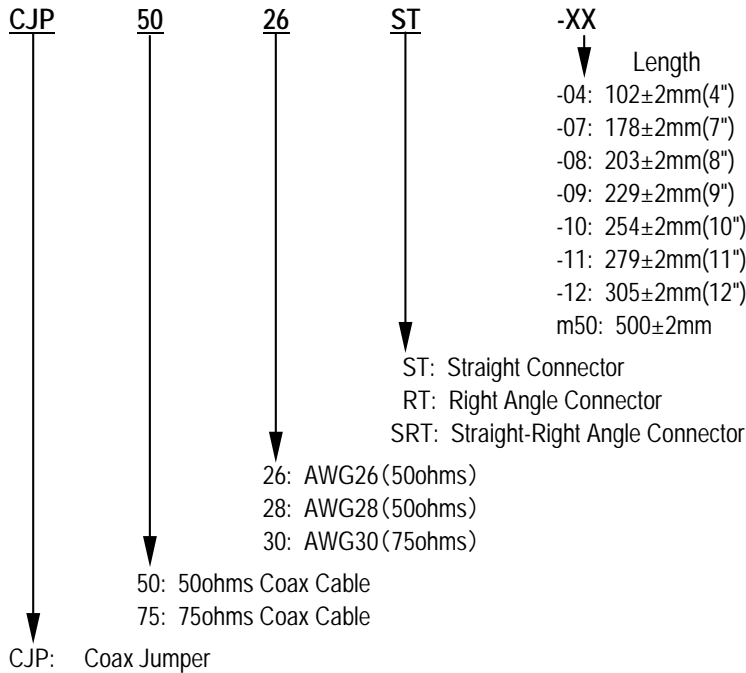

Pictur of Straight Connector Cable

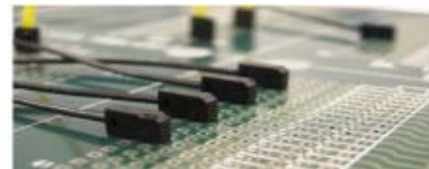

Pictur of Right Angle Connector Cable

Copyright© 2001 Nihon I/F K.K. All Rights Reserved. N I/F reserves the right to make changes in the product specifications identified in this catalog without notice. N I/F advises its customers to obtain the latest version of product to verify, before PC board design and placing orders, that the information being relied upon by customer is current.

Nihon I/F Postal Code170-0002, Pyua-Takashima 2fl, 1-24-7 Sugamo, Toshima-ward, Tokyo, Japan Phone: 81-3-5976-4560 Fax: 81-3-5976-8802

E-mail: info@nif-kk.co.jp Web: <http://www.nif-kk.com>